

> FLIP TOP STEPS (STANDARD)



Designed and developed especially for aircraft ramp maintenance engineers, the flip top step is quick to position and safe to work from in all weather conditions. The step comes complete with standard 30mm towing eye for easy towing


This versatile step has been especially designed and developed with aircraft ramp maintenance engineers to provide a versatile safe user friendly stable work platform for fast turn round access and maintenance activity in all conditions. Easy to tow, manoeuvre and position with large wheels, robust turntable steering with auto braking/jacking and optional additional kick down front jacks. Large non-slip self draining treads with full length low level platform and a lightweight aluminium upper Flip Step.

The latest models of this proven access step are now fitted with telescopic stainless sliding handrails on all three sides. This easy to operate handrail system is supported by maintenance free bearings and provides total safety for all configurations and working heights.

The steps are now available as standard with enhanced specification running gear including heavy duty foam filled 600 x 9 tyres. For "hanger use only" lighter duty wheels can be fitted as an option.

Crank action front jacks are fitted as standard and these are lowered automatic when the tow bar is raised and stowed. In addition to the self setting forward jacks additional kick-down jacks are available as an option. However, these are not generally required for normal applications.

- ▶ Handrails for all operating conditions
- ▶ Designed for ramp towing
- ▶ Automatic front stabilisers
- ▶ Lightweight flip over step

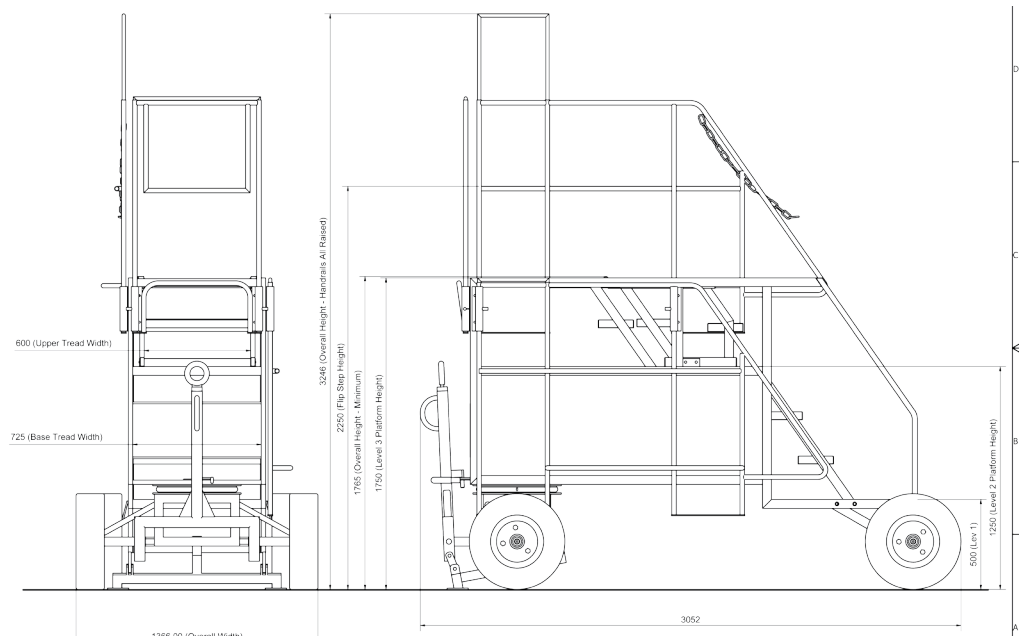

SPECIFICATIONS

Dimensions (mm)	6004-050	6004-051	6004-052	6004-053
Overall Max Height (H)	3180	3180	3180	3180
Overall Length (L)	2920	2920	2920	2920
Platform Height (Level 1) (h1)	500	500	500	500
Platform Height (Level 2) (h2)	1250	1250	1250	1250
Platform Height (Level 3) (h3)	1750	1750	1750	1750
Platform Height (Level 4) (h4)	2250	2250	2250	2250
Platform Depth (Level 1) (D1)	450	450	450	450
Platform Depth (Level 2) (D2)	750	750	750	750
Platform Depth (Level 3) (D3)	1380	1380	1380	1380
Platform Depth (Level 4) (D4)	600	600	600	600
Overall Width (W)	1135	1135	1535	1860
Lower Tread / Platform Width (w)		725	1125	1450
Level 4 Width (w4)		650	1050	1375
Wheels Type	Foam filled	Foam filled	Foam filled	Foam filled
Wheels Size	600 x 9	600 x 9	900 x 6	900 x 6
Width Type	Narrow	Standard	Medium tread	Double tread
Colour finish	Yellow	Yellow	Yellow	Yellow

> OPTIONS / EXTRAS

- ▶ Tow hitch dimensions - 30mm (Standard fit suitable for 25mm pin), 40mm, 50mm, 75mm
- ▶ Customised RAL colours / corporate colours
- ▶ Kick down rear jacks
- ▶ Wire tool basket
- ▶ Additional buffers